

Wi-Fi 6 AX2400 2.4GHz/5GHz VPN Security Router



Powerful Wi-Fi 6 and VPN Security Solution

The **Wi-Fi 6** or **802.11ax** is the latest generation of wireless networking technology and offers greater capacity, efficiency and performance for advanced connectivity. With Wi-Fi 6 technology, it creates tremendous worldwide opportunities for e-business and information sharing but also brings advanced network security issues for businesses. The demand for information security and wireless connection has become the primary concern for the enterprises.

To fulfill this demand, PLANET has launched the all-in-one **VR-300W6A** and **VR-300PW6A** Wireless VPN Security Routers that carry several main categories across your network security deployments:

- **Wi-Fi 6 technology**
- **Cybersecurity**
- **SPI firewall security protection,**
- **Policy auditing (content filtering, VPN tunnel and MAC/IP filtering)**
- **AP controller**
- **Captive portal, RADIUS**
- **Easy management (Setup Wizard, DHCP Server and Dashboard)**

Furthermore, its Dual-WAN Failover, Outbound Load Balance and High-Availability features can improve the network efficiency while the web-based interface provides friendly and consistent user experience.



Highlights

- Dual-WAN failover and Dual-WAN load balancing
- Complies with IEEE 802.11ax and IEEE 802.11a/b/g/n/ac standards
- SSL VPN and robust hybrid VPN (IPSec/PPTP/L2TP over IPSec)
- Stateful Packet Inspection (SPI) firewall and content filtering
- Blocks DoS/DDOS attack, port range forwarding
- High Availability, AP Controller, Captive Portal and RADIUS
- IPv6, SNMP, PLANET DDNS and Universal Network Management System
- Compliant with the IEEE 802.3at PoE+ with PD alive check/schedule management (VR-300PW6A)

Hardware

- 5 10/100/1000BASE-T RJ45 ports (VR-300W6A)
- 5 10/100/1000BASE-T RJ45 ports with 4-port **IEEE 802.3at PoE+** injector function (VR-300PW6A)
- 1 undefined Ethernet port (LAN/WAN) for Dual-WAN function
- 1 USB 3.0 port for system configuration backup and restoration
- 4 5dBi wireless antennas
- Reset button
- Desktop installation or rack mounting

RF Interface Characteristics

- Features 2.4GHz (802.11b/g/n/ax) and 5GHz (802.11a/n/ac/ax) selectable dual band for carrying high load traffic
- 4T4R MIMO technology for enhanced throughput and coverage
- Provides multiple adjustable transmit power control
- High speed up to 2.4Gbps (600Mbps for 2.4GHz or 2400Mbps for 5GHz) wireless data rate

IP Routing Feature

- Static Route
- Dynamic Route
- OSPF

Firewall Security

- Cybersecurity
- Stateful Packet Inspection (SPI) firewall
- Blocks DoS/DDoS attack
- Content Filtering
- MAC Filtering and IP Filtering

Wireless 11ax Brings Excellent Data Link Speed

The VR-300W6A and VR-300PW6A are designed with high power amplifier and 4 highly-sensitive antennas which provide stronger signal and excellent coverage even in the wide-ranging or bad environment. With adjustable transmit power option, the administrator can flexibly reduce or increase the output power for various environments, thus reducing interference to achieve maximum performance. Equipped with the next-generation Wi-Fi 6 (802.11ax) wireless network standard, the total bandwidth reaches **2400Mbps**, and the 4-stream transmission technology improves the transmission efficiency of multiple devices, making AR/VR/IoT applications smoother.

Equipped with the next-generation Wi-Fi 6 (802.11ax) wireless network standard, the VR-300W6A and VR-300PW6A extend the 802.11n 40MHz channel binding to 80MHz+80MHz and the implementation of 1024-QAM modulation where higher transmitting/receiving rates go up to 2400Mbps in 5GHz less interference frequency band and the 4-stream transmission technology improves the transmission efficiency of multiple devices, making AR/VR/IoT applications smoother. In addition, the VR-300W6A and VR-300PW6A are equipped with Gigabit LAN port to eliminate the restriction of 100Mbps Fast Ethernet wired connection to let users fully enjoy the high speed provided by wireless. The IEEE 802.11ax also optimizes MU-MIMO (Multi-User MIMO) mechanism to serve multiple devices simultaneously.

WPA3 Next Generation Security for Your WLAN Solution

WPA3 is the next generation Wi-Fi security technology that provides the most advanced security protocol to the market. WPA3 makes your connection more secure by preventing hackers from easily cracking your password no matter how simplified the password is. WPA3 can also provide more reliable password-based authentication, so it can better protect the security of individual users.

* VR-300W6A and VR-300PW6A only support WPA3-Personal.

Wi-Fi Deployments and Authentication with Simplified Management

The VR-300W6A and VR-300PW6A also provides a built-in AP Controller, Captive Portal, RADIUS and a DHCP server to facilitate small and medium businesses to deploy secure employee and guest access services without any additional server. The VR-300W6A and VR-300PW6A can offer a secure Wi-Fi network with easy installation for your business.



- NAT ALGs (Application Layer Gateway)
- Blocks SYN/ICMP Flooding

VPN Features

- IPSec/Remote Server (Net-to-Net, Host-to-Net), GRE, PPTP Server, L2TP Server, SSL Server/Client (Open VPN)
- Max. Connection Tunnel Entries: 60 VPN tunnels,
- Encryption methods: DES, 3DES, AES, AES-128/192/256
- Authentication methods: MD5, SHA-1, SHA-256, SHA-384, SHA-512

Networking

- Outbound load balancing
- Failover for dual-WAN
- High Availability
- Captive Portal
- RADIUS Server/Client
- Static IP/PPPoE/DHCP client for WAN
- DHCP server/NTP client for LAN
- Protocols: TCP/IP, UDP, ARP, IPv4, IPv6
- Port forwarding, QoS, DMZ, IGMP, UPnP, SNMPv1,v2c, v3
- MAC address clone
- DDNS: PLANET DDNS, Easy DDNS, DynDNS and No-IP

Power over Ethernet (VR-300PW6A)


- Complies with IEEE 802.3at Power over Ethernet Plus, end-span PSE
- Backward compatible with IEEE 802.3af Power over Ethernet
- Up to 4 ports of IEEE 802.3af / 802.3at devices powered
- Supports PoE power up to 36 watts for each PoE port
- Auto detects powered device (PD)
- Circuit protection prevents power interference between ports
- PoE management
 - Total PoE power budget control
 - Per port PoE function enable/disable
 - PoE port power feeding priority
 - Per PoE port power limitation
 - PD classification detection
 - PD alive check

Others

- Setup wizard
- Dashboard for real-time system overview
- Supported access by HTTP or HTTPS
- Auto reboot
- PLANET NMS System and Smart Discovery Utility for deployment management
- Planet CloudViewer App for real-time monitoring


Centralized Remote Control of Managed APs*

The VR-300W6A and VR-300PW6A provide centralized management of PLANET Smart AP series via a user-friendly Web GUI. It's easy to configure AP for the wireless SSID, radio band and security settings. With a four-step configuration process, different purposes of wireless profiles can be simultaneously delivered to multiple APs or AP groups to minimize deployment time, effort and cost.

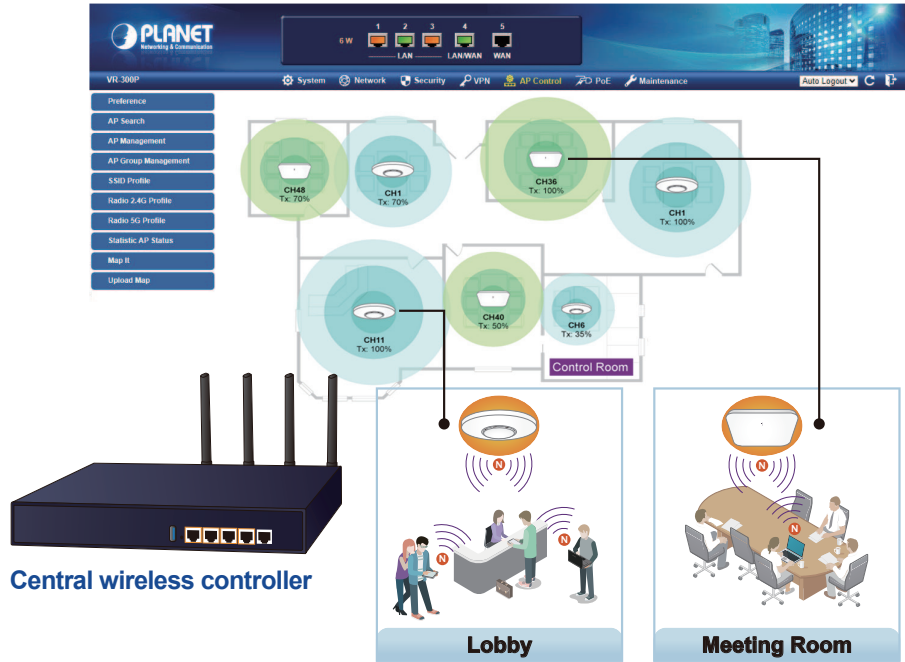


For example, to configure multiple Smart APs of the same model, the VR-300W6A and VR-300PW6A allow clustering them to a managed group for unified management. According to requirements, wireless APs can be flexibly expanded or removed from a wireless AP group at any time. The AP cluster benefits bulk provision and bulk firmware upgrade through single entry point instead of having to configure settings in each of them separately.

Simplified Cluster Management with 4 Steps

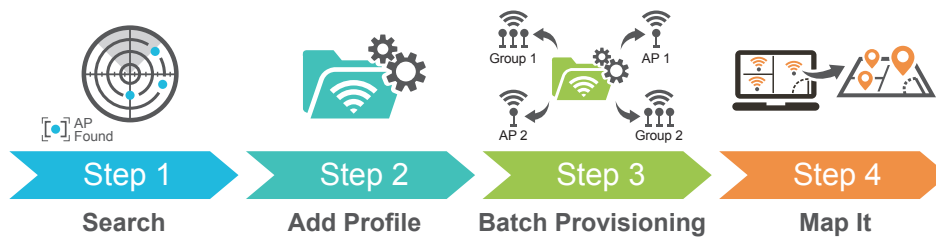


Ideal High-Availability VPN Security Router Solution for SMBs

The VR-300W6A and VR-300PW6A provide complete data security and privacy for accessing and exchanging most sensitive data, built-in IPSec VPN function with DES/3DES/AES encryption and MD5/SHA-1/SHA-256/SHA-384/SHA-512 authentication, and GRE, SSL, PPTP and L2TP server mechanism. The full VPN capability in the VR-300PW6A makes the connection secure, more flexible, and more capable.

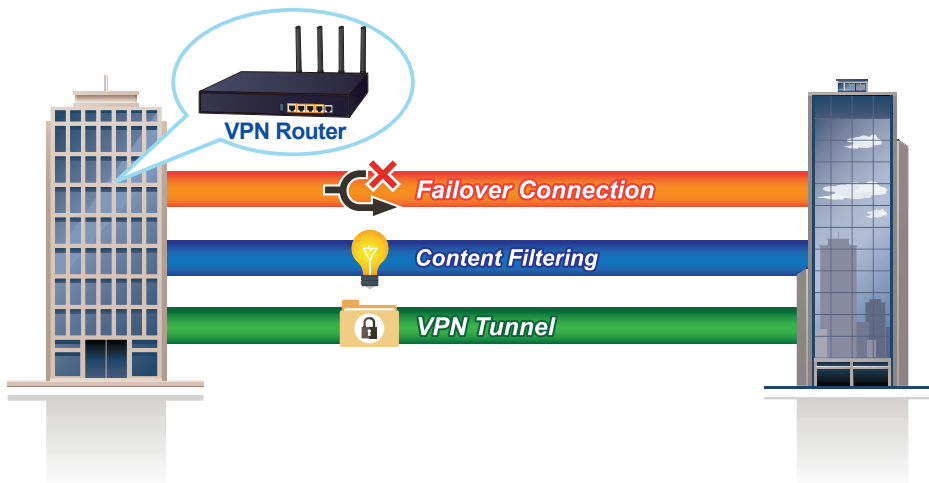

Excellent Ability in Threat Defense

The VR-300W6A and VR-300PW6A are built-in SPI (stateful packet inspection) firewall and DoS/DDoS attack mitigation functions provide high efficiency and extensive protection for your network. Thus, virtual server and DMZ functions can let you set up servers in the Intranet and still provide services to the Internet users.

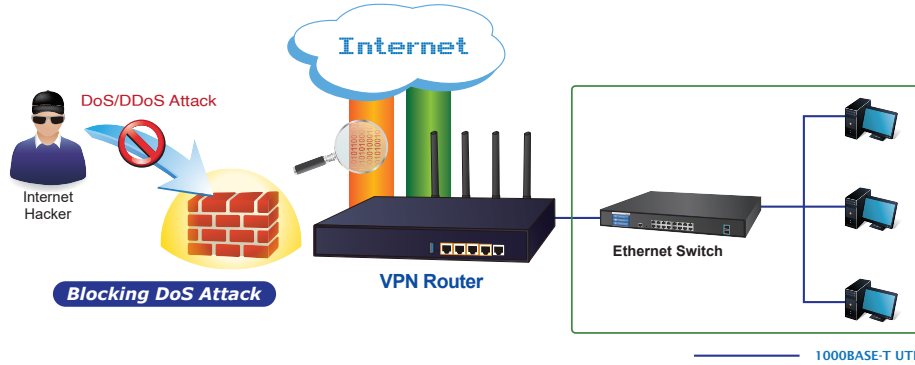

Cybersecurity Network Solution to Minimize Security Risks


The cybersecurity feature included to protect the switch management in a mission-critical network virtually needs no effort and cost to install. For efficient management, the VR-300W6A and VR-300PW6A are equipped with HTTPS web and SNMP management interfaces. With the built-in web-based management interface, the VR-300W6A and VR-300PW6A offer an easy-to-use, platform independent management and configuration facility. The VR-300W6A and VR-300PW6A support SNMP and it can be managed via any management software based on the standard SNMP protocol.

Built-in Unique PoE Functions for Powered Devices Management

The VR-300PW6A is capable of having a maximum of up to 120 watts of power output and can deliver up to 36W for each port. It also features the following special PoE management functions:


PoE Schedule

Under the trend of energy saving worldwide and contributing to environmental protection, the VR-300PW6A can effectively control the power supply besides its capability of giving high watts power. The “PoE schedule” function helps you to enable or disable PoE power feeding for each PoE port during specified time intervals and it is a powerful function to help SMBs or enterprises save power and budget. It also increases security by powering off PDs that should not be in use during non-business hours.

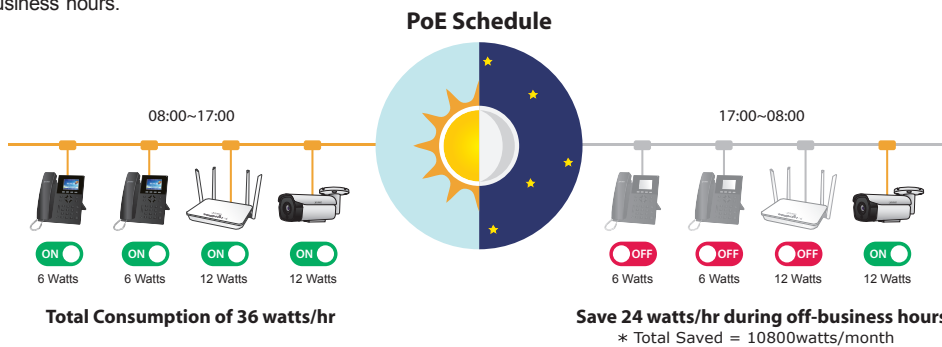

Scheduled Power Recycling


The VR-300PW6A allows each of the connected PoE IP cameras or PoE wireless access points to reboot at a specific time each week. Therefore, it will reduce the chance of IP camera or AP crash resulting from buffer overflow.

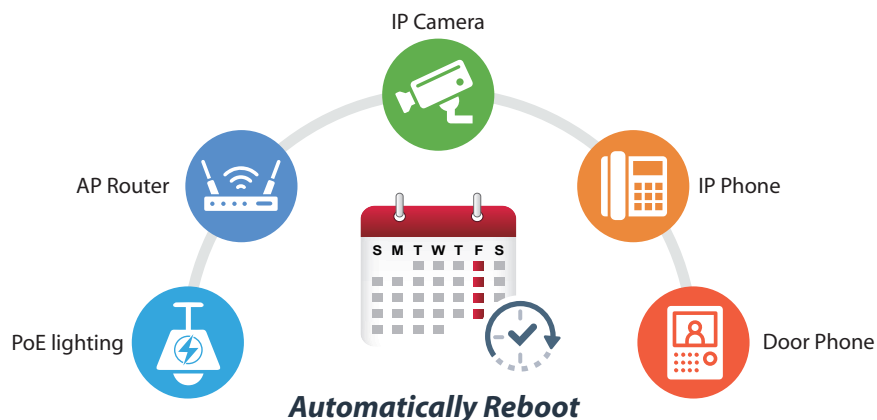

PD Alive Check

The VR-300PW6A can be configured to monitor connected PD status in real time via ping action. Once the PD stops working and responding, the VR-300PW6A will resume the PoE port power and bring the PD back to work. It will greatly enhance the network reliability through the PoE port resetting the PD's power source and reducing administrator management burden.

PD Alive Check

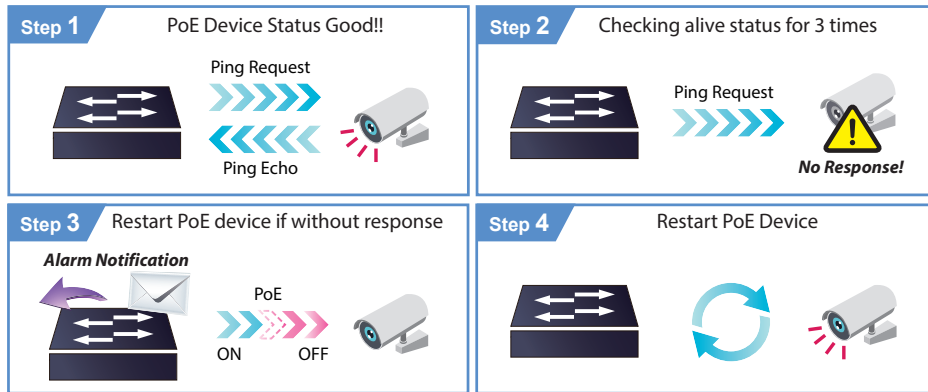


PoE Usage Monitoring

With PoE usage monitoring, it can show the PoE loading of each port, total PoE power usage and system status, such as overload, low voltage, over voltage and high temperature. User can obtain detailed information about the real-time PoE working condition of the VR-300PW6A directly.

Applications

Improving Network Efficiency


It is applicable to the small-scale sector (from 60 to 100 people), using a 13-inch desktop design, with five Gigabit ports (WAN/LAN). It provides higher performance with all Gigabit Ethernet interfaces which offer faster speeds for your network applications. The Gigabit user-defined interfaces flexibly fulfill the network requirement nowadays, and the High-Availability and Dual-WAN interfaces enable the VR-300W6A and VR-300PW6A to support outbound load balancing and WAN fail-over features.

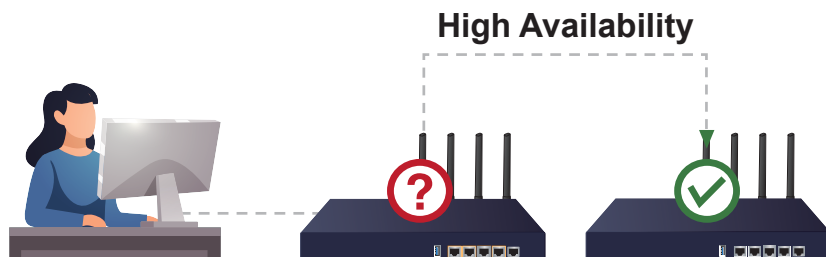

Furthermore, the VR-300W6A and VR-300PW6A can connect dual IPv4/v6 WANs with up to two different ISPs and support many popular security features including Content Filtering to block specific URL feature that can automatically resolve the IP address corresponding to all. Users' network can be easily managed by just typing the URL of the websites like Facebook, YouTube and Yahoo.




The VR-300W6A and VR-300PW6A both have link redundancy, MAC/IP filtering, outbound load balancing, QoS and many more functions to make the entire network system better. It creates a stable and qualified VPN security connection for many important applications such as VoIP, video conferencing and data transmission. The VR-300W6A's and VR-300PW6A's economical price with complete network security management features make it an inevitable choice for the next-generation office network load balancer.

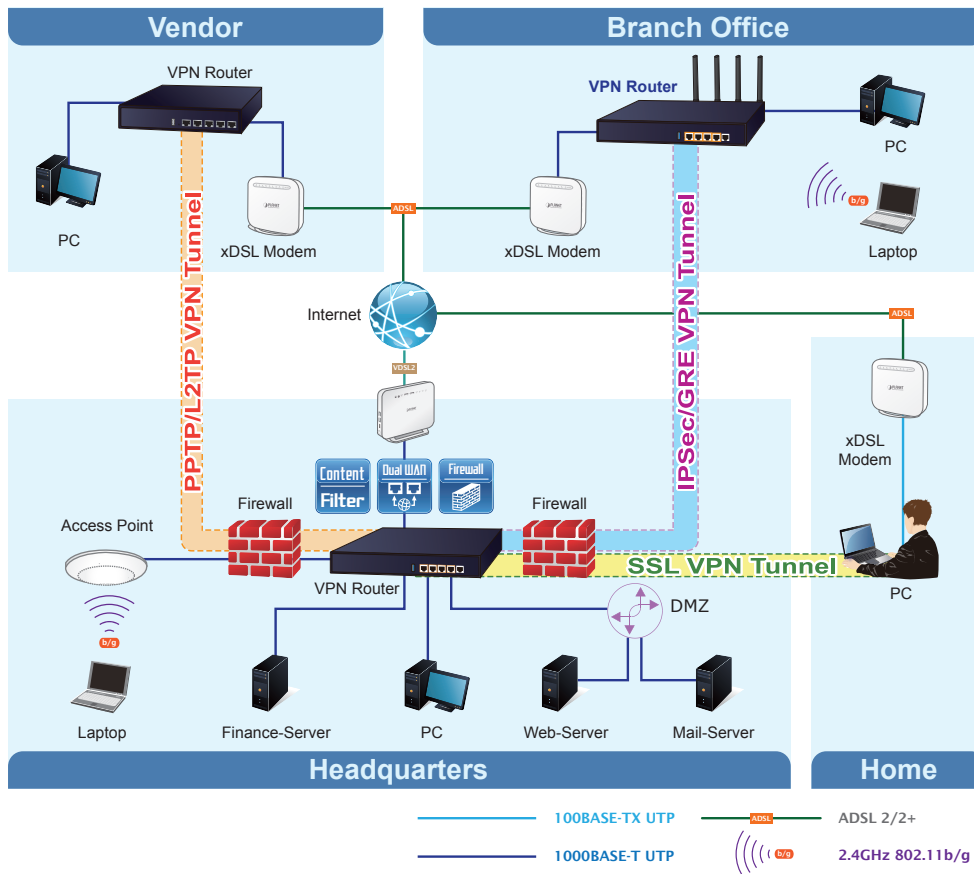

Extremely High-speed and Dual-band Capabilities Make Wi-Fi Transmission More Powerful

The VR-300W6A and VR-300PW6A deliver the Dual Band technology to avoid signal interference and ensure the best Wi-Fi performance. It allows you to check e-mail and surf the Internet via the 2.4GHz band and simultaneously watch High-Definition (HD) video or any other multimedia application via 5GHz band. Moreover, the Gigabit Ethernet ports of the VR-300W6A and VR-300PW6A offer ultra-fast wired connections that utilize the maximum wireless bandwidth; therefore, users will have real wireless speed over 100Mbps. With outstanding stability of high-speed wireless transmission, the VR-300W6A and VR-300PW6A can provide users with excellent experience in multimedia streaming with your mobile devices anywhere, anytime.

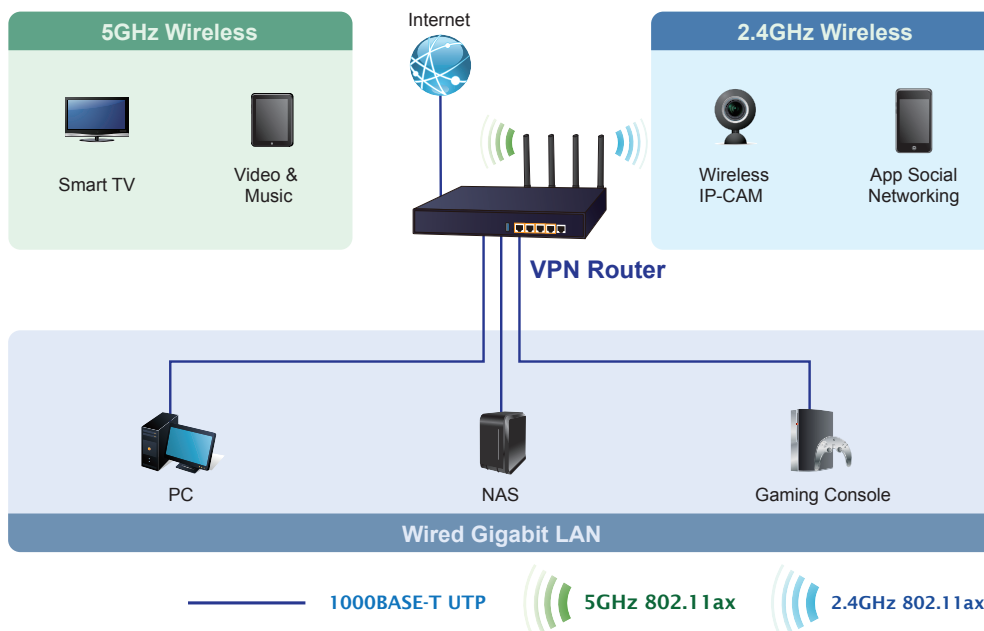

Specifications

Hardware Specifications	
Ethernet	5 10/100/1000BASE-T RJ45 Ethernet ports including 3 LAN ports (Ports 1 to 3) 1 LAN/WAN port (Port 4) 1 WAN port (Port 5)
Antennas	4 external 5dBi, 2.4GHz/5GHz dual-band SMA antennas
USB Port	1 USB 3.0 port for system configuration backup and restoration
Reset Button	Reset to factory default
Thermal Fan	1
LED Indicators	- PWR (Green) Internet (Green) LAN/WAN (Green) 2.4G (Green) 5G (Green) PoE-in-Use LED (Amber)
Installation	Desktop installation or rack mounting
Power Requirements	100~240V AC, 50/60Hz, auto-sensing
Power Consumption / Dissipation	Max. 24W/81.91BTU Max. 140W/477.7BTU
Weight	1.5 kg 1.7 kg
Dimensions (WxDxH)	330 x 155 x 43.5 mm, 1U height
Enclosure	Metal


Wireless	
Standard	IEEE 802.11a/n/ac/ax 5GHz IEEE 802.11g/b/n/ax 2.4GHz
Band Mode	2.4G / 5G selectable mode
Frequency Range	2.4GHz America FCC: 2.412~2.462GHz Europe ETSI: 2.412GHz~2.472GHz 5GHz America FCC: 5.180~5.240GHz, 5.745~5.825GHz Europe ETSI: 5.180~5.700GHz
Operating Channels	2.4GHz America FCC: 1~11 Europe ETSI: 1~13 5GHz America FCC: Non-DFS: 36, 40, 44, 48, 149,153,157,161,165 DFS: 52, 56, 60, 64, 100, 104, 108, 112, 116, 132, 136, 140 Europe ETSI: Non-DFS: 36, 40, 44, 48 DFS: 52, 56, 60, 64, 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140 5GHz channel list will vary in different countries according to their regulations.
Channel Width	20MHz, 40MHz, 80MHz, 80+80 MHz

Data Transmission Rates	Transmit: 600 Mbps* for 2.4 GHz or 2400 Mbps* for 5 GHz Receive: 600 Mbps* for 2.4 GHz or 2400 Mbps* for 5 GHz *The estimated transmission distance is based on the theory. The actual distance will vary in different environments.
Transmission Power	11b: 23dbm+/- 1.5dbm @11Mbps 11g: 20dbm+/- 1.5dbm @54Mbps 11g/n: 20dBm +/- 1.5dbm @MCS7, HT20 17dBm@MCS7,HT40 11a: 19.5dBm +/- 1.5dbm @54Mbps 11a/n: 19.5dBm+/- 1.5dbm @MCS7, HT20 17dBm@MCS7, HT40 11ac HT20: 20+/-1.5dBm @MCS8 11ac HT40: 17+/-1.5dBm @MCS9 11ac HT80: 14.5+/-1.5dBm @MCS9 11ax HT20: 20+/-1.5dBm @MCS9 11ax HT40: 17 +/- 1.5dBm @MCS9 11ax HT80: 14.5 +/- 1.5dBm @MCS11
Encryption Security	WEP (64/128-bit) encryption security WPA / WPA2 (TKIP/AES) WPA-PSK / WPA2-PSK (TKIP/AES) / WPA3-PSK (TKIP/AES) 802.1x Authenticator
Wireless Advanced	Wi-Fi Multimedia (WMM) Auto channel selection Wireless output power management MAC address filtering
Security Service	
Firewall Security	Cybersecurity Stateful Packet Inspection (SPI) Blocks DoS/DDoS attack
ALG (Application Layer Gateway)	SIP, RTSP, FTP, H.323, TFTP
NAT	Port forwarding DMZ Host UPnP
Content Filtering	MAC filtering IP filtering Web filtering
Bandwidth Management	Outbound load balancing Failover for dual-WAN QoS (Quality of Service)
VPN	
VPN Function	IPSec/Remote Server (Net-to-Net, Host-to-Net) GRE PPTP Server L2TP Server SSL Server/Client (Open VPN)
VPN Tunnels	Max. 60
VPN Throughput	Max. 60Mbps
Encryption Methods	DES, 3DES, AES or AES-128/192/256 encryption
Authentication Methods	MD5/SHA-1/SHA-256/SHA-384/SHA-512 authentication algorithm
Networking	
Operation Mode	Routing mode
Routing Protocol	Static Route, Dynamic Route (RIP), OSPF
VLAN	802.1q Tag-based, Port-based, Multi-VLAN
Multicast	IGMP Proxy
NAT Throughput	Max. 900Mbps
Outbound Load Balancing	Supported algorithms: Weight
Protocol	IPv4, IPv6, TCP/IP, UDP, ARP, HTTP, HTTPS, NTP, DNS, PLANET DDNS, PLANET Easy DDNS, DHCP, PPPoE, SNMPv1/v2c/v3,
Key Features	HA (High Availability) Captive Portal RADIUS Server/Client AP Control

Management

Basic Management Interfaces	Web browser SNMP v1, v2c PLANET Smart Discovery utility/UNI-NMS supported
Secure Management Interfaces	SSHv2, TLSv1.2, SNMP v3
System Log	System Event Log
Others	Setup wizard Dashboard System status/service Statistics Connection status Auto reboot Diagnostics
Standards Conformance	
Regulatory Compliance	CE, FCC
Environment Specifications	
Operating	Temperature: 0 ~ 50 degrees C Relative Humidity: 5 ~ 95% (non-condensing)
Storage	Temperature: -10 ~ 60 degrees C Relative Humidity: 5 ~ 95% (non-condensing)

Dimensions

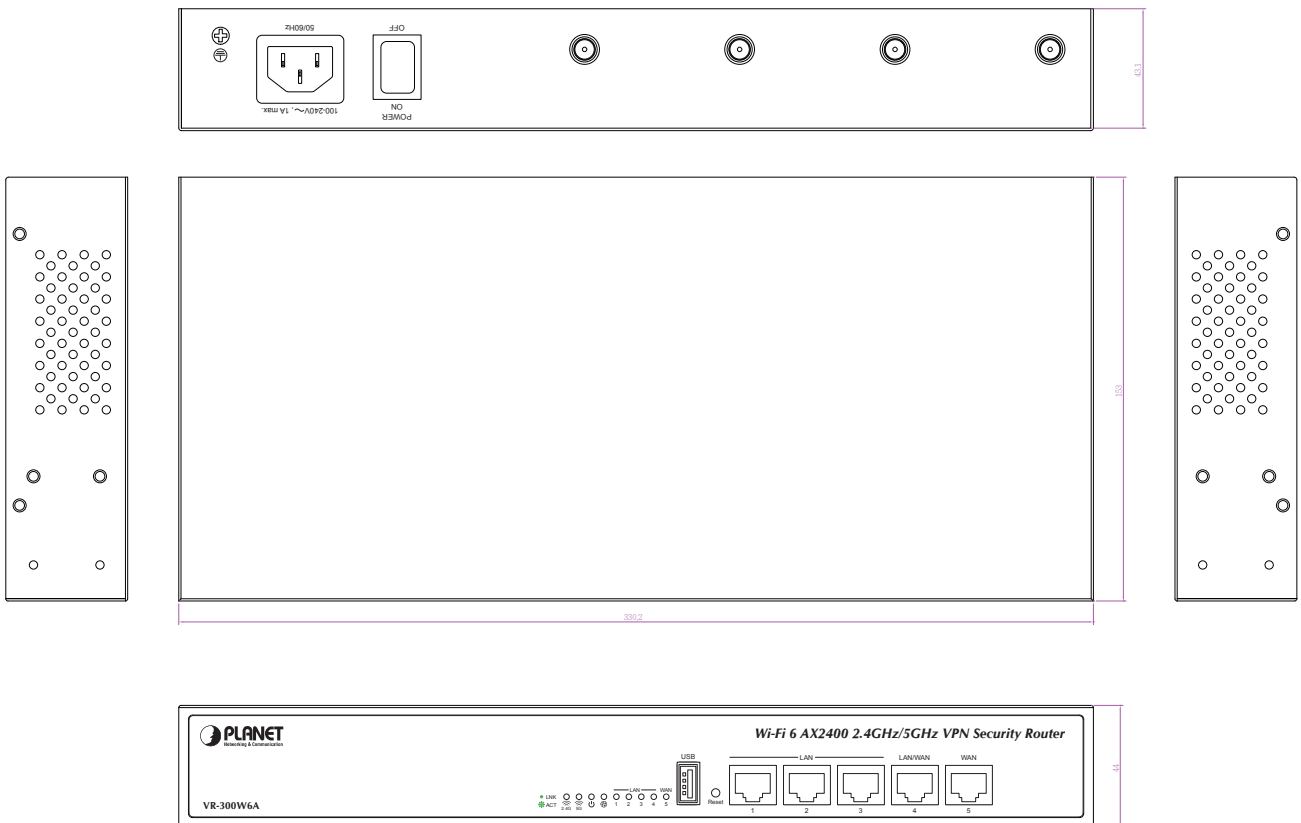

Unit: mm



DIREKTRONIK

Direktronik AB tel. 08-52 400 700 www.direktronik.se