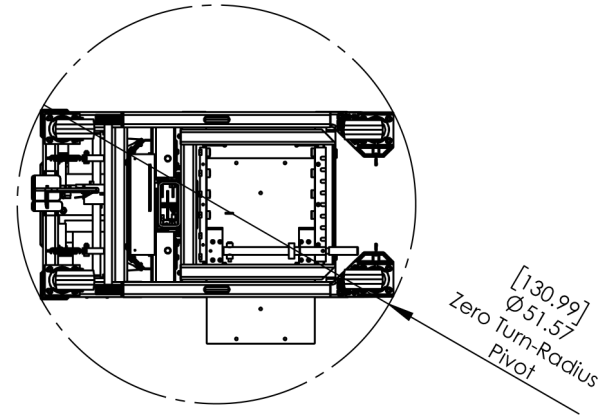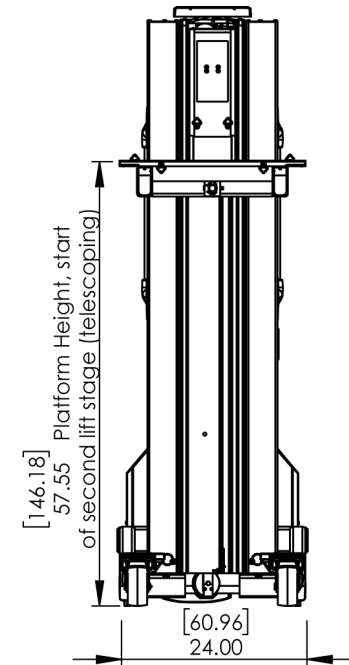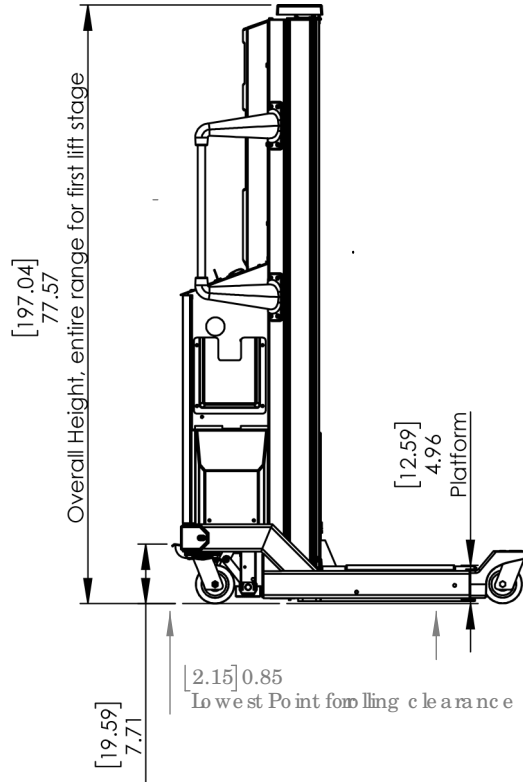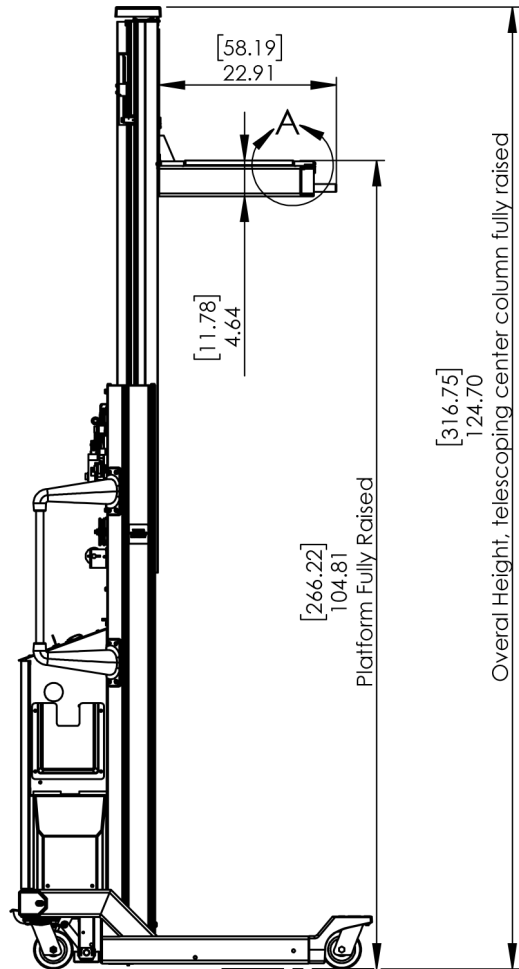# serverLIFT™

DIREKTRONIK

Dataprodukter utöver det vanliga

The ServerLIFT **SL-1000X** is the flagship of all ServerLIFT products designed to move equipment up to 1000 lbs and usable in even the tightest of environments. Built for years of service, the **SL-1000X** is the most robust data center lift available anywhere.

Weight: 539 lbs [244.49 kg]
Shipping Weight: 700 lbs [317.51 kg]
Zero Turn Radius (can pivot on axis when front casters are unlocked)
Aisle and "T" Intersection turn limit: 34" [86.36 cm]
Side Shelf distance: 6" each side - 12" total travel [30.48 cm]
Minimum Aisle Width: 25" [63cm]
Shelf upper load limit: 8' [243.80 cm]
Shelf lower limit: 4.96 " [12.59 cm]
Maximum load capacity rating: 1000 lbs [453.59 kg]

[58.19]
22.91

A

[11.78]
4.64

[316.75]
124.70
Overall Height, telescoping center column fully raised

[266.22]
104.81
Platform Fully Raised

[130.99]
Ø 51.57
Zero Turn-Radius
Pivot

[197.04]
77.57
Overall Height, entire range for first lift stage

[12.59]
4.96
Platform

[146.18]
57.55
Platform Height, start
of second lift stage (telescoping)

[2.15] 0.85
Lowest Point for rolling clearance

[19.59]
7.71

[60.96]
24.00

PART NO.

SL-1000X™

PRINT DATE:
1/11/2016
COPYRIGHT 2016
SERVERLIFT CORPORATION

Notes:

DIREKTRONIK
Dataprodukter utöver det vanliga