



UNIT: mm

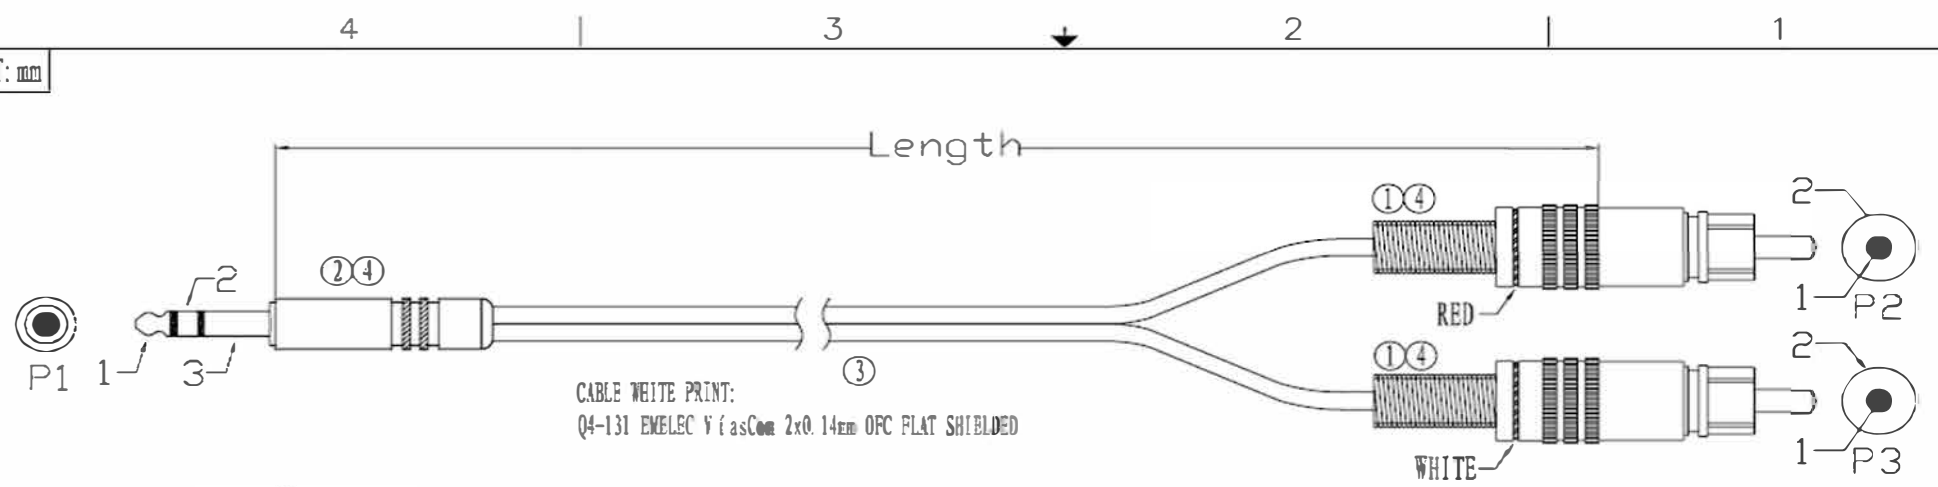

CABLE WHITE PRINT:
Q4-131 EMELEC ViasConn 2x0.14mm OFC FLAT SHIELDED

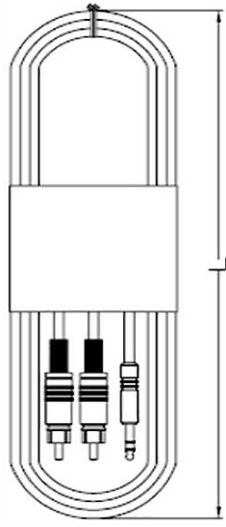

EMELEC P/N	Length (mm)	COLOR BOX (mm)	WINDING L
EQ66050CS	1000 ± 30	90*60*10	260 ± 20mm
EQ660503S	3000 ± 30	90*60*10	280 ± 20mm
EQ660505S	5000 ± 50	120*90*12	300 ± 20mm
EQ660510S	10000 ± 80	150*90*25	320 ± 20mm

PIN ASSIGNMENT		
P1	P1 (RED)	P2 (WHITE)
1	1 RED	
2		1 WHITE
3	2	2 DRAIN

NOTE:
1. Open/Short test: 100%;
2. Conductor Resistance: 3 ohm;
3. Insulation Resistance: 10M ohm;
4. Hi-Pot: 400V/DC;

NO.	NAME	Q'TY	SPECIFICATION
④	TUBE	7	CLEAR OD: 3.0mm L=10 ± 2mm
③	CABLE	1	Q4-131 BLACK 0.14mm ² [(18/0.1BC)/1C+(40/0.1BC)/S]*2F OD: 3.8*7.6mm
②	CONN	1	JACK 3.5STEREO MALE (EQ9045/B)
①	CONN	1+1	MALE RCA CABLE CONNECTOR SOLIDER TYPE WITH RED AND WHITE RING (EQ9026/BR-BV)

DRAWN BY		DRAWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	EQ6605XXS
DECIDE BY		DATE	2013. 03. 28
VERSIONS/EDITED	A/1	PROJECTION	