



High Integrated Out-Door Weather Station CO₂, PM2.5, Illumination, Temperature, Humidity, Noise, Atmospheric Pressure Sensor

an intergraded outdoor sensor unit for all types of environmental and weather monitoring sensors include illumination, temperature, humidity, noise, Atmospheric Pressure and CO₂ or PM2.5&10. The monitored data is output through RS-485 interface by Modbus protocol. The sensor unit accepts 10~30Vdc power input voltage and is protected by the IP65 grade Anti-U/V lightweight ABS louver radiation shield. With the optional NBloT/WiFi gateway or LoRa end node the data can be monitor on the cloud platform.

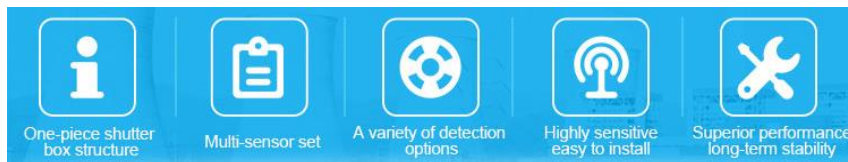


Features & Benefits

- **High Integrated Monitoring**
 - Intergraded multiple sensors
 - Central management by sharing a signal output
 - Support Industrial Modbus RTU protocol, RS485
- **Outdoor Protective Enclosure**
 - Prevent direct ultraviolet radiation to the sensors
 - Avoid rapid aging of sensors under harsh environmental conditions such as strong winds, rain, and snow
 - The sensor parts are ventilated for truly sensing the changes in external detection parameters
- **Flexible Design**
 - Customized Shutter Height
 - Single or multiple parameters both can use small shutter, small size, light weight and easy to install
 - Customized Monitoring parameters
 - Each parameter is independent and high sensitivity, users can freely integrate monitoring parameters
- **Work with IoT Cloud Platform - ThingsMasterOTA**
 - Real-time online monitoring, analysis, reporting
 - Remote cloud security and visual management

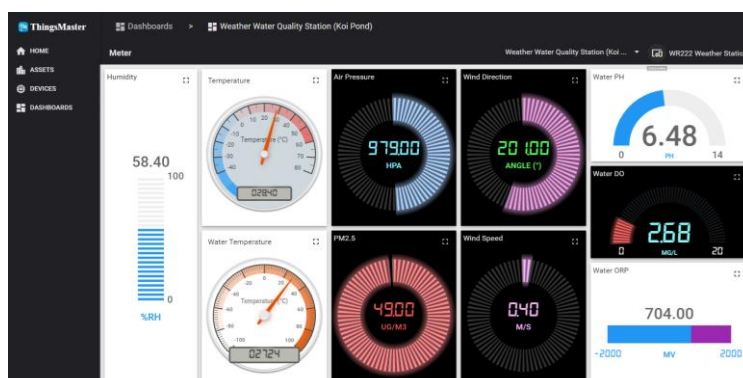




Application

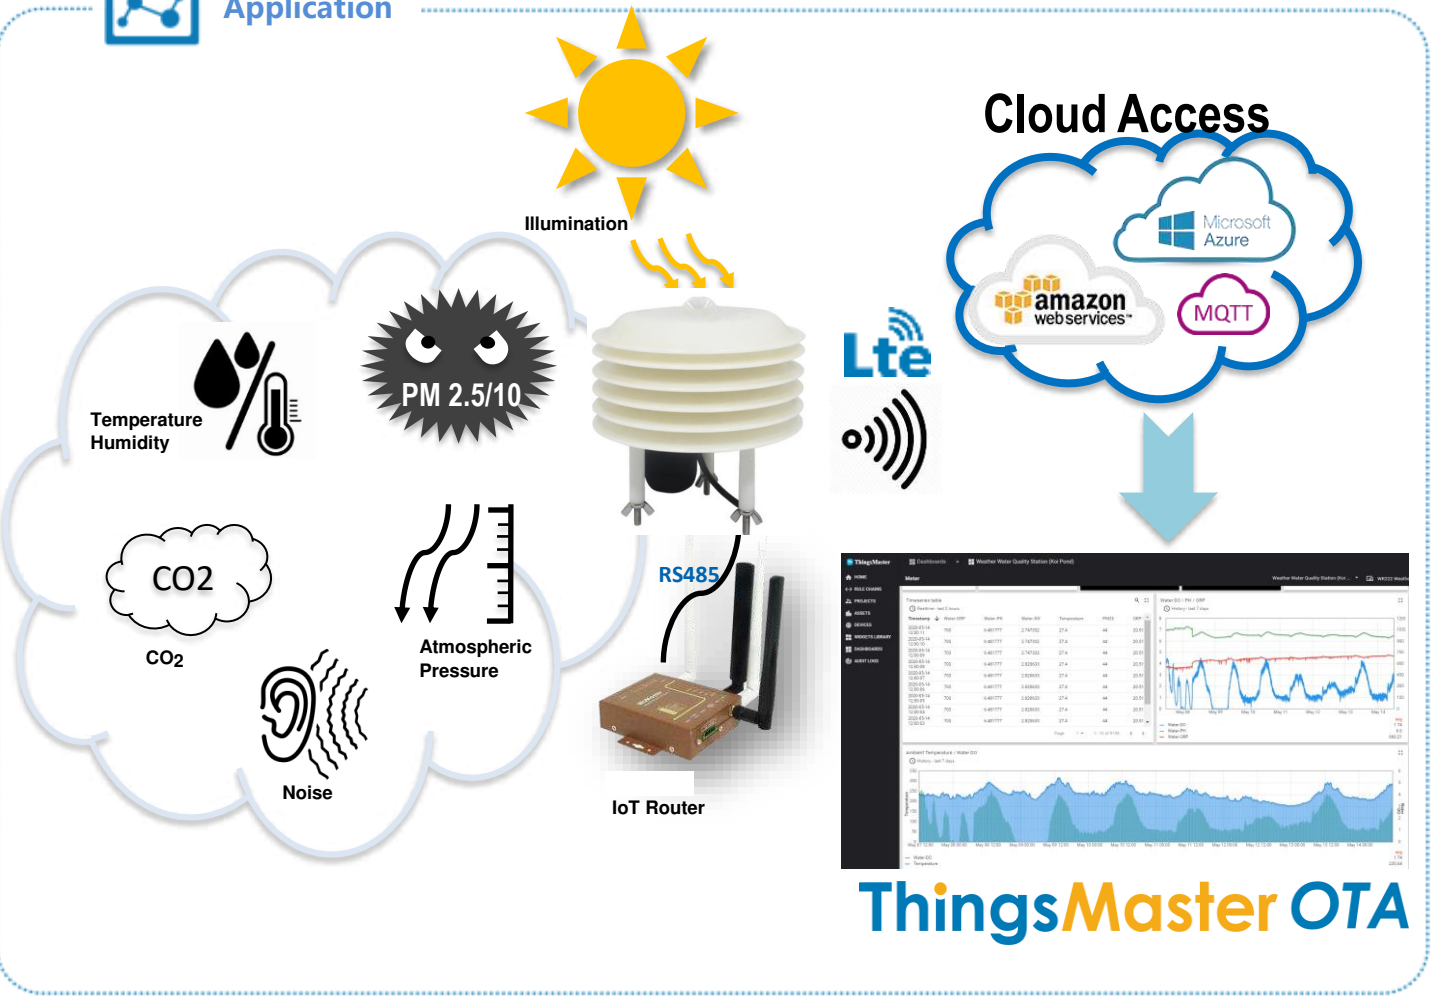


ThingsMaster OTA



Dimensions

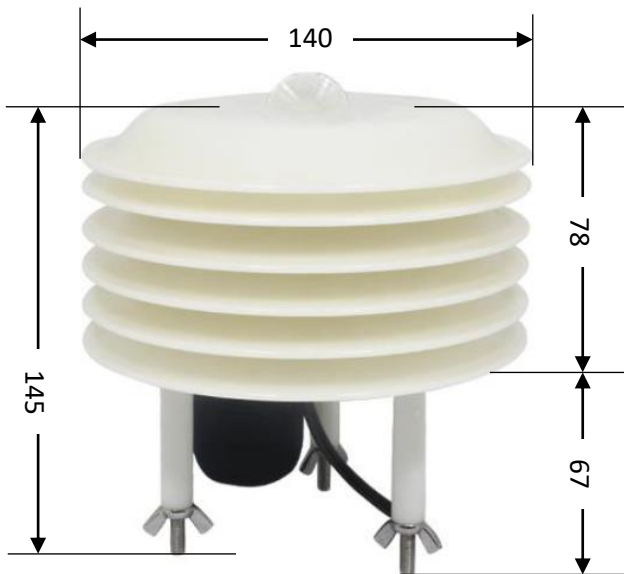

Main Device

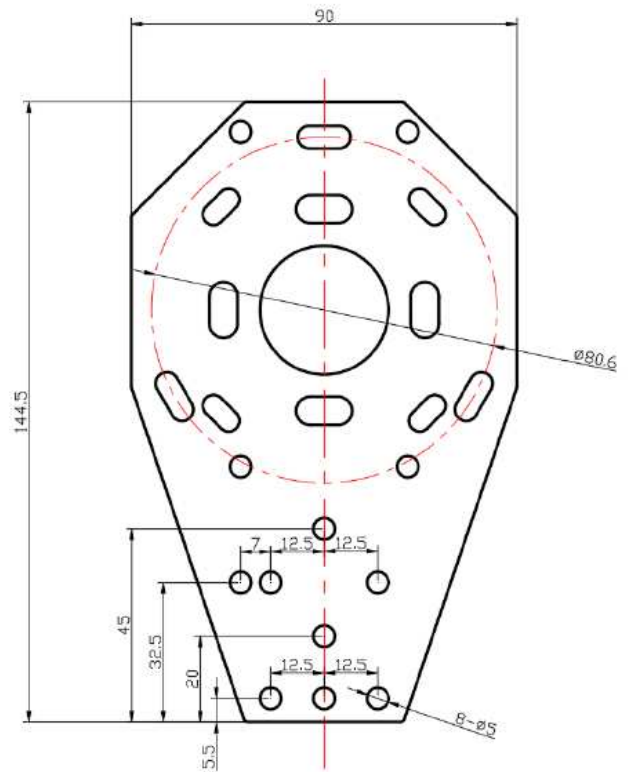

Mount Kit

(mm)

| Temperature & Humidity | |
|---------------------------------------|---|
| Measuring Range | Temperature: -40-120 °C (Sensor Measuring Range) Humidity: 0%RH-100%RH |
| Accuracy | Temperature: $\pm 0.5^{\circ}\text{C}$ (25°C) Humidity: $\pm 3\%$ RH (5%-95% RH, 25°C) |
| Long term stability | Temperature $\leq 0.1^{\circ}\text{C}/\text{year}$ Humidity $\leq 1\%$ RH/year |
| Response time | <15/Sec (at 1m/s wind speed) |
| Illumination | |
| Measuring Range | 0~200000 Lux |
| Accuracy | $\pm 7\%$ (25°C) |
| Long term stability | $\leq 0.5^{\circ}\text{C}/\text{Year}$ |
| Response time | 0.1 Sec. |
| CO2 (Either CO2 or PM2.5/PM10) | |
| Measuring Range | 0~5000ppm |
| Accuracy | $\pm 40\text{ppm} + 3\%\text{FS}$ (25°C) |
| Long term stability | $\leq 30\text{ppm}/\text{year}$ |
| Response time | <10/S (1m/s wind speed) |
| PM2.5/PM10 (Either CO2 or PM2.5/PM10) | |
| Measuring Range | 0~1000ug/m3 |
| Resolution | 1ug/m3 |
| Accuracy | $\pm 10\%$ |
| Response time | <90 Sec. |
| Sensor Operating | Temperature -20-60°C Humidity: 0%-80%RH, No Condensing |
| Atmospheric Pressure | |
| Measuring Range | 0~120Kpa |
| Accuracy | $\pm 1.5\text{Kpa}$ (25°C) |
| Long term stability | 0.1Kpa/Year |
| Response time | ≤ 1 Sec. |
| Sensor Operating | Temperature -20-60°C Humidity: 0%-80%RH, No Condensing |
| Noise | |
| Measuring Range | 30dB~120dB |
| Frequency Range | 20Hz~12.5Hz |
| Accuracy | $\pm 0.5\text{dB}$ |
| Long term stability | <2% |
| Response time | ≤ 3 seconds |
| Sensor Operating | Temperature -20 ~ 60°C Humidity: 0%~80%RH |

| System Parameters | |
|-----------------------------|---|
| Power Range | DC 10~30V, 0.8W Power consumption |
| Enclosure Material | Shelter Box, Plastic ABS, Anti-U/V, UL94 V0 |
| Enclosure Protection | IP65 Protection Level |
| Enclosure Dimension | 140mm (Diameter) x 114mm (High) |
| Communication | Modbus RTU protocol, 2-Wire RS-485 RS485 Modbus RTU Pulling & Waiting Time ≥ 200mS |
| Op. Temperature | -40 ~ 60°C, 0~80% Humidity, No Condensing |

| Modbus Register Information | | | |
|-----------------------------|---------------------------|-------------------------|--|
| Parameters Function | Register Add. (HEX / DEC) | PLC Add. (Index Number) | Note |
| Device ID Storage Add. | 07D0H / 2000 | 2001 | R/W , System Factory Default ID: 1 |
| Serial Baud Rate Add. | 07D1H / 2001 | 2002 | R/W , Default: 2 2(9600), 0(2400), 1(4800) |
| Humidity | 01F4H / 500 | 501 | R/O , Real Value = Read Value/10 |
| Temperature | 01F5H / 501 | 502 | R/O ,Real Value = Read Value/10 |
| Noise | 01F6H / 502 | 503 | R/O , Real Value = Read Value/10 |
| CO2 or PM2.5 | 01F7H / 503 | 504 | R/O. CO2 /PM2.5 Real Value = Read Value |
| PM10 | 01F8H / 504 | 505 | R/O, Real Value = Read Value, (Available on ES105-PM) |
| Atmospheric Pressure | 01F9H / 505 | 506 | R/O, Real Value = Read Value x10 |
| Light Intensity (High) | 01FAH / 506 | 507 | R/O, Real Value = Read Value |
| Light Intensity (Low) | 01FBH / 508 | 508 | R/O, Real Value = Read Value |

R/W: Read & Write, R/O: Read Only

Ordering Information

| Model | Description |
|---------------------------|--|
| 20101797 -PM | High Integrated Environmental Sensor Shelter Box, Temperature, Humidity, PM2.5/10, Illumination, Noise, Modbus RTU protocol, 2-wire RS-485 , 10~30VDC |
| 20101800 -CO ₂ | High Integrated Environmental Sensor Shelter Box, Temperature, Humidity, CO ₂ , Illumination, Noise, Modbus RTU protocol, 2-wire RS-485, 10~30VDC |
| | Package List |
| | 1 x Multiple Sensor Shelter Box |
| | 1 x QIG |